
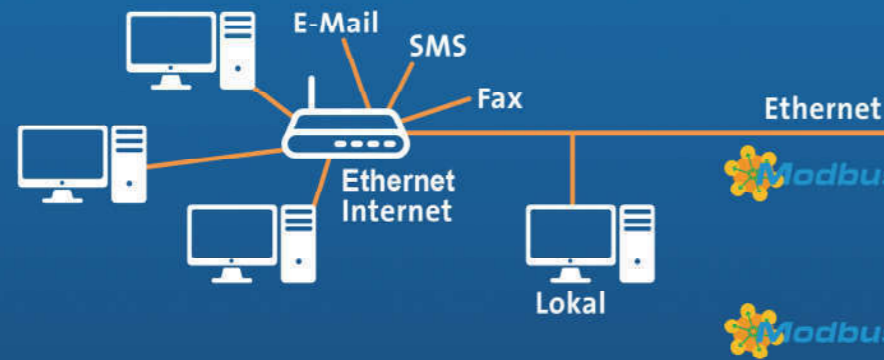
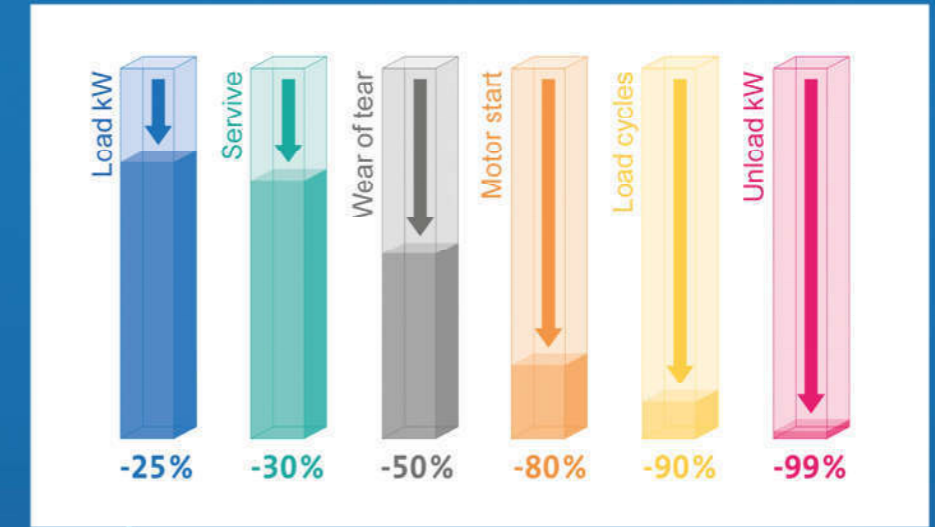
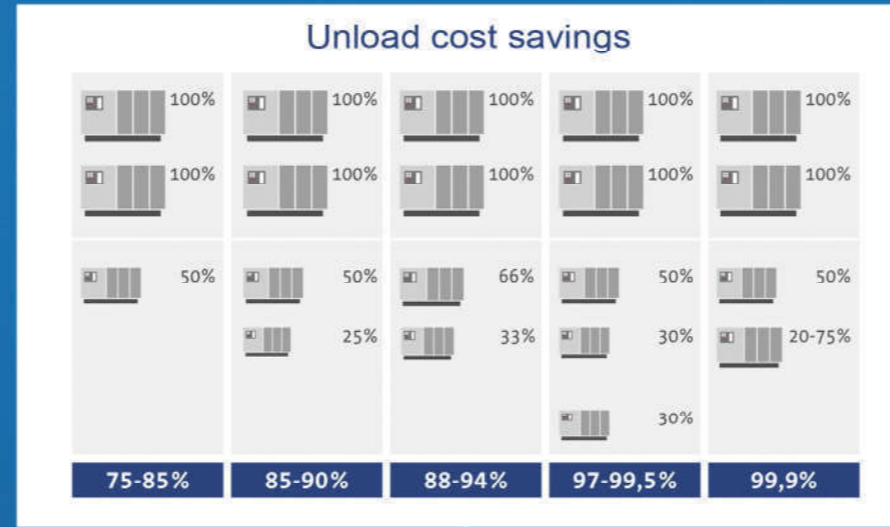


The 8-fold trend calculation...

...choose the right combination...




...and save compressed air costs

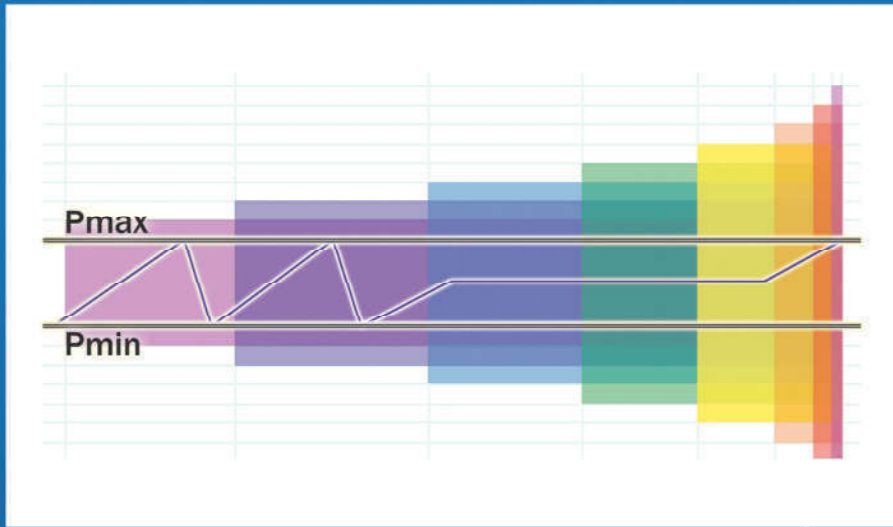


Mobil Gateway



4-20 mA

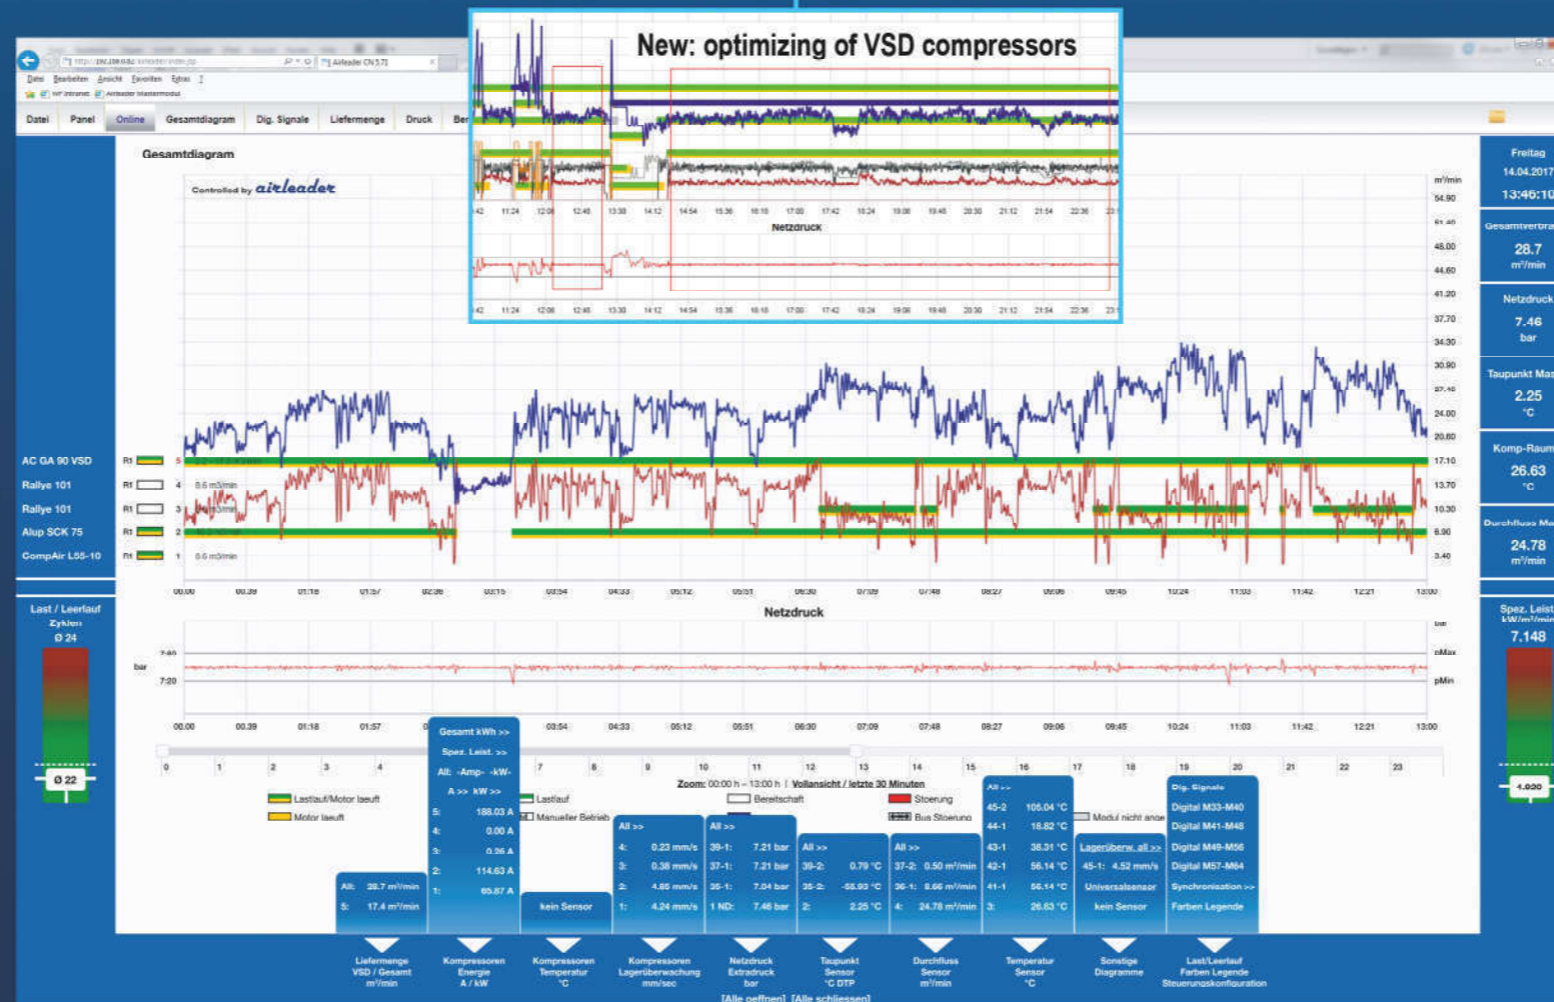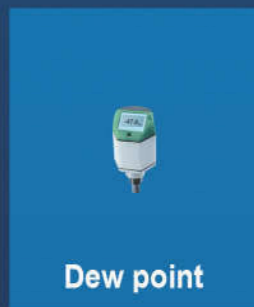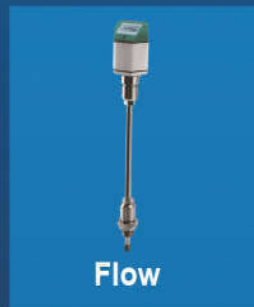

And this is what you get with airleader!

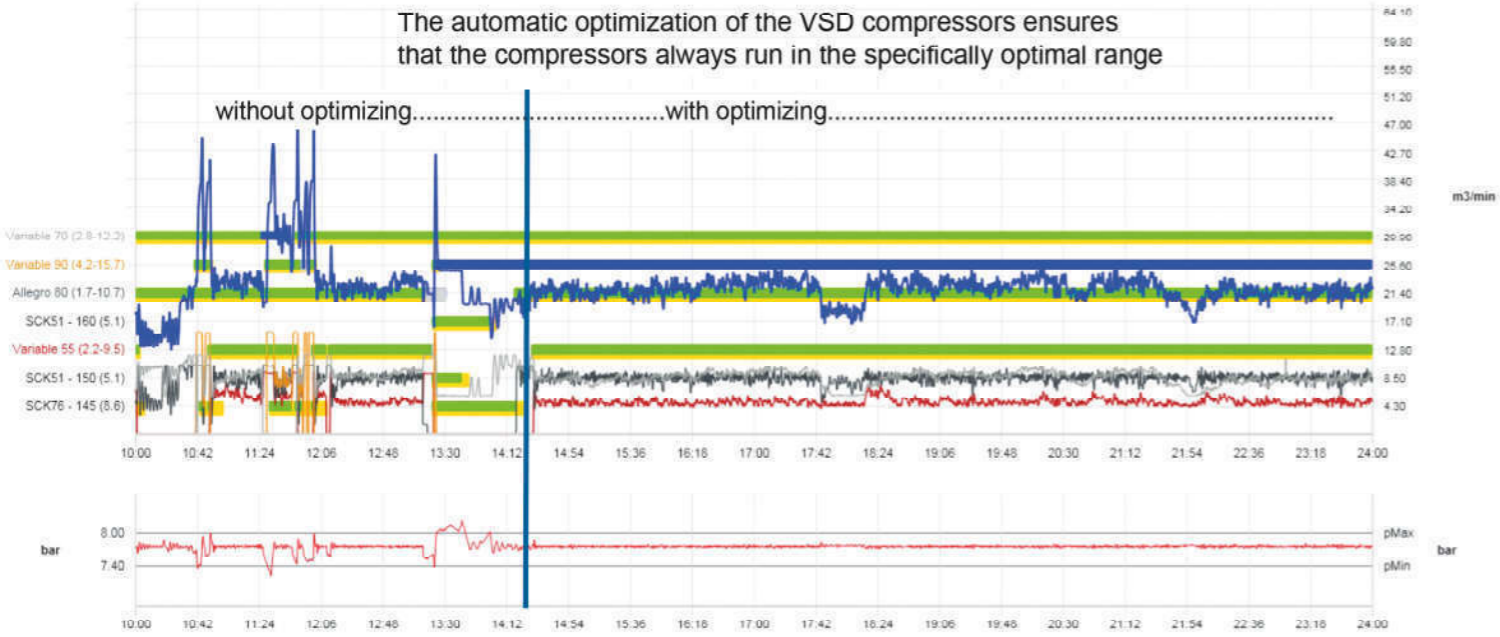

Specification:

airleader

	EASY	MASTER-4	CN-4
Number of connectable compressors	4	16	32
Number of speed controlled compressors	1	2	2
Number of connectable modules for sensors and accessories	2	8	32
Number of possible analogue inputs	2 (Option 4)	52	132
Display	3,5" color-LCD	7" Touchscreen	17" Touchscreen
Industrial housing for wall mountig L x W x D	300 x 300 x 120	500 x 500 x 210	780 x 780 x 300
Memory capacity for detailed history and statistical data (in addition of the online visual display via PC or Internet via Browserr	> 4 years (8 GByte)	> 4 years (8 GByte)	> 20 years (20 GByte)
Interfaces	2 x RS 485 1 x Ethernet	4 x RS 485 1 x Ethernet	4 x RS 485 1 x Ethernet

Competence for your compressed air station

- Automatically optimized
- Self-learning
- Simple installation
- Simple operation



airleader
Compressor Management